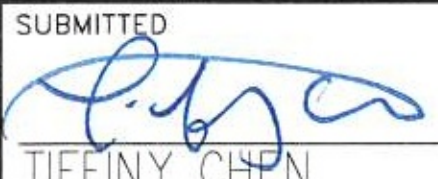


CITY OF PASADENA
DEPARTMENT OF PUBLIC WORKS

ANNUAL STORM DRAIN SYSTEM REPAIR &
IMPROVEMENTS - FY26

SUBMITTED

TIFFINY CHEN

APPROVED

BRENT MAULE
CITY ENGINEER
REGISTERED CIVIL ENGINEER NO. C80265
REGISTRATION EXPIRES: SEPTEMBER 30, 2026

3.4.26
DATE




LEGEND

● REPAIR STORM DRAIN INFRASTRUCTURE

GENERAL NOTES

- ALL WORK SHALL BE DONE IN ACCORDANCE WITH THE "STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION," 2021 EDITION, INCLUDING ANY SUPPLEMENTS; THE CITY OF PASADENA SUPPLEMENTS AND MODIFICATIONS TO THE ABOVE.
- CONTRACTOR SHALL VERIFY AND LOCATE ALL EXISTING ABOVE AND UNDERGROUND UTILITIES. LOCATIONS SHOWN ON THE PLANS ARE APPROXIMATE AND ARE SHOWN FOR GENERAL INFORMATION ONLY.
- CONTRACTOR SHALL VERIFY THE LOCATION AND QUANTITY OF EXISTING SURFACE STRUCTURES AND SHALL BE SOLELY RESPONSIBLE FOR ANY UNIDENTIFIED UTILITIES, IMPROVEMENTS, TREES, ETC. TO BE DEMOLISHED AND REMOVED WITHIN THE DEMOLITION LIMIT LINE, INCLUDING APPURTENANT FOUNDATIONS OR SUPPORTS.
- DEMOLITION CALLOUTS IN THIS SECTION ARE REPRESENTATIVE OF WHAT IS TO BE DONE, NOT AN ITEMIZED ACCOUNTING FOR EACH PIPE, CATCH BASIN, MANHOLE, VAULT, ETC. THAT IS TO BE DEMOLISHED, REMOVED AND DISPOSED OF.
- CONTRACTOR SHALL BE RESPONSIBLE TO REPAIR/REPLACE IN-KIND DAMAGED INFRASTRUCTURE DUE TO CONSTRUCTION.
- CONTRACTOR TO PROVIDE THE CITY A COPY OF THE CCTV INSPECTIONS. CONTRACTOR WILL BE RESPONSIBLE FOR ANY DEFECT REPAIRS WITH ENGINEER'S APPROVAL. THIS WORK SHALL BE PERFORMED PRIOR TO START OF WORK.
- CONTRACTOR SHALL REMOVE ALL SEDIMENT, MUD, CONSTRUCTION DEBRIS, OR OTHER POTENTIAL POLLUTANTS THAT MAY HAVE BEEN DISCHARGED TO OR ACCUMULATE IN, THE FLOWLINES, STORM DRAINAGE APPURTENANCES, AND PUBLIC RIGHTS OF WAY AS A RESULT OF CONSTRUCTION ACTIVITIES ASSOCIATED WITH THIS SITE DEVELOPMENT OR CONSTRUCTION PROJECT. SAID REMOVAL SHALL BE CONDUCTED IN A TIMELY MANNER.
- CONTRACTOR SHALL PREVENT SEDIMENT, DEBRIS AND ALL OTHER POLLUTANTS FROM ENTERING THE STORM DRAIN SYSTEM DURING ALL DEMOLITION, EXCAVATION, TRENCHING, BORING, GRADING, OR OTHER CONSTRUCTION OPERATIONS THAT ARE PART OF THIS PROJECT. THE CONTRACTOR SHALL BE HELD RESPONSIBLE FOR REMEDIATION OF ANY ADVERSE IMPACTS TO THE MUNICIPAL SEPARATE STORM DRAIN SYSTEM, RECEIVING WATERS, WATERWAYS, WETLANDS, AND OR OTHER PUBLIC OR PRIVATE PROPERTIES, RESULTING FROM WORK DONE AS PART OF THIS PROJECT.

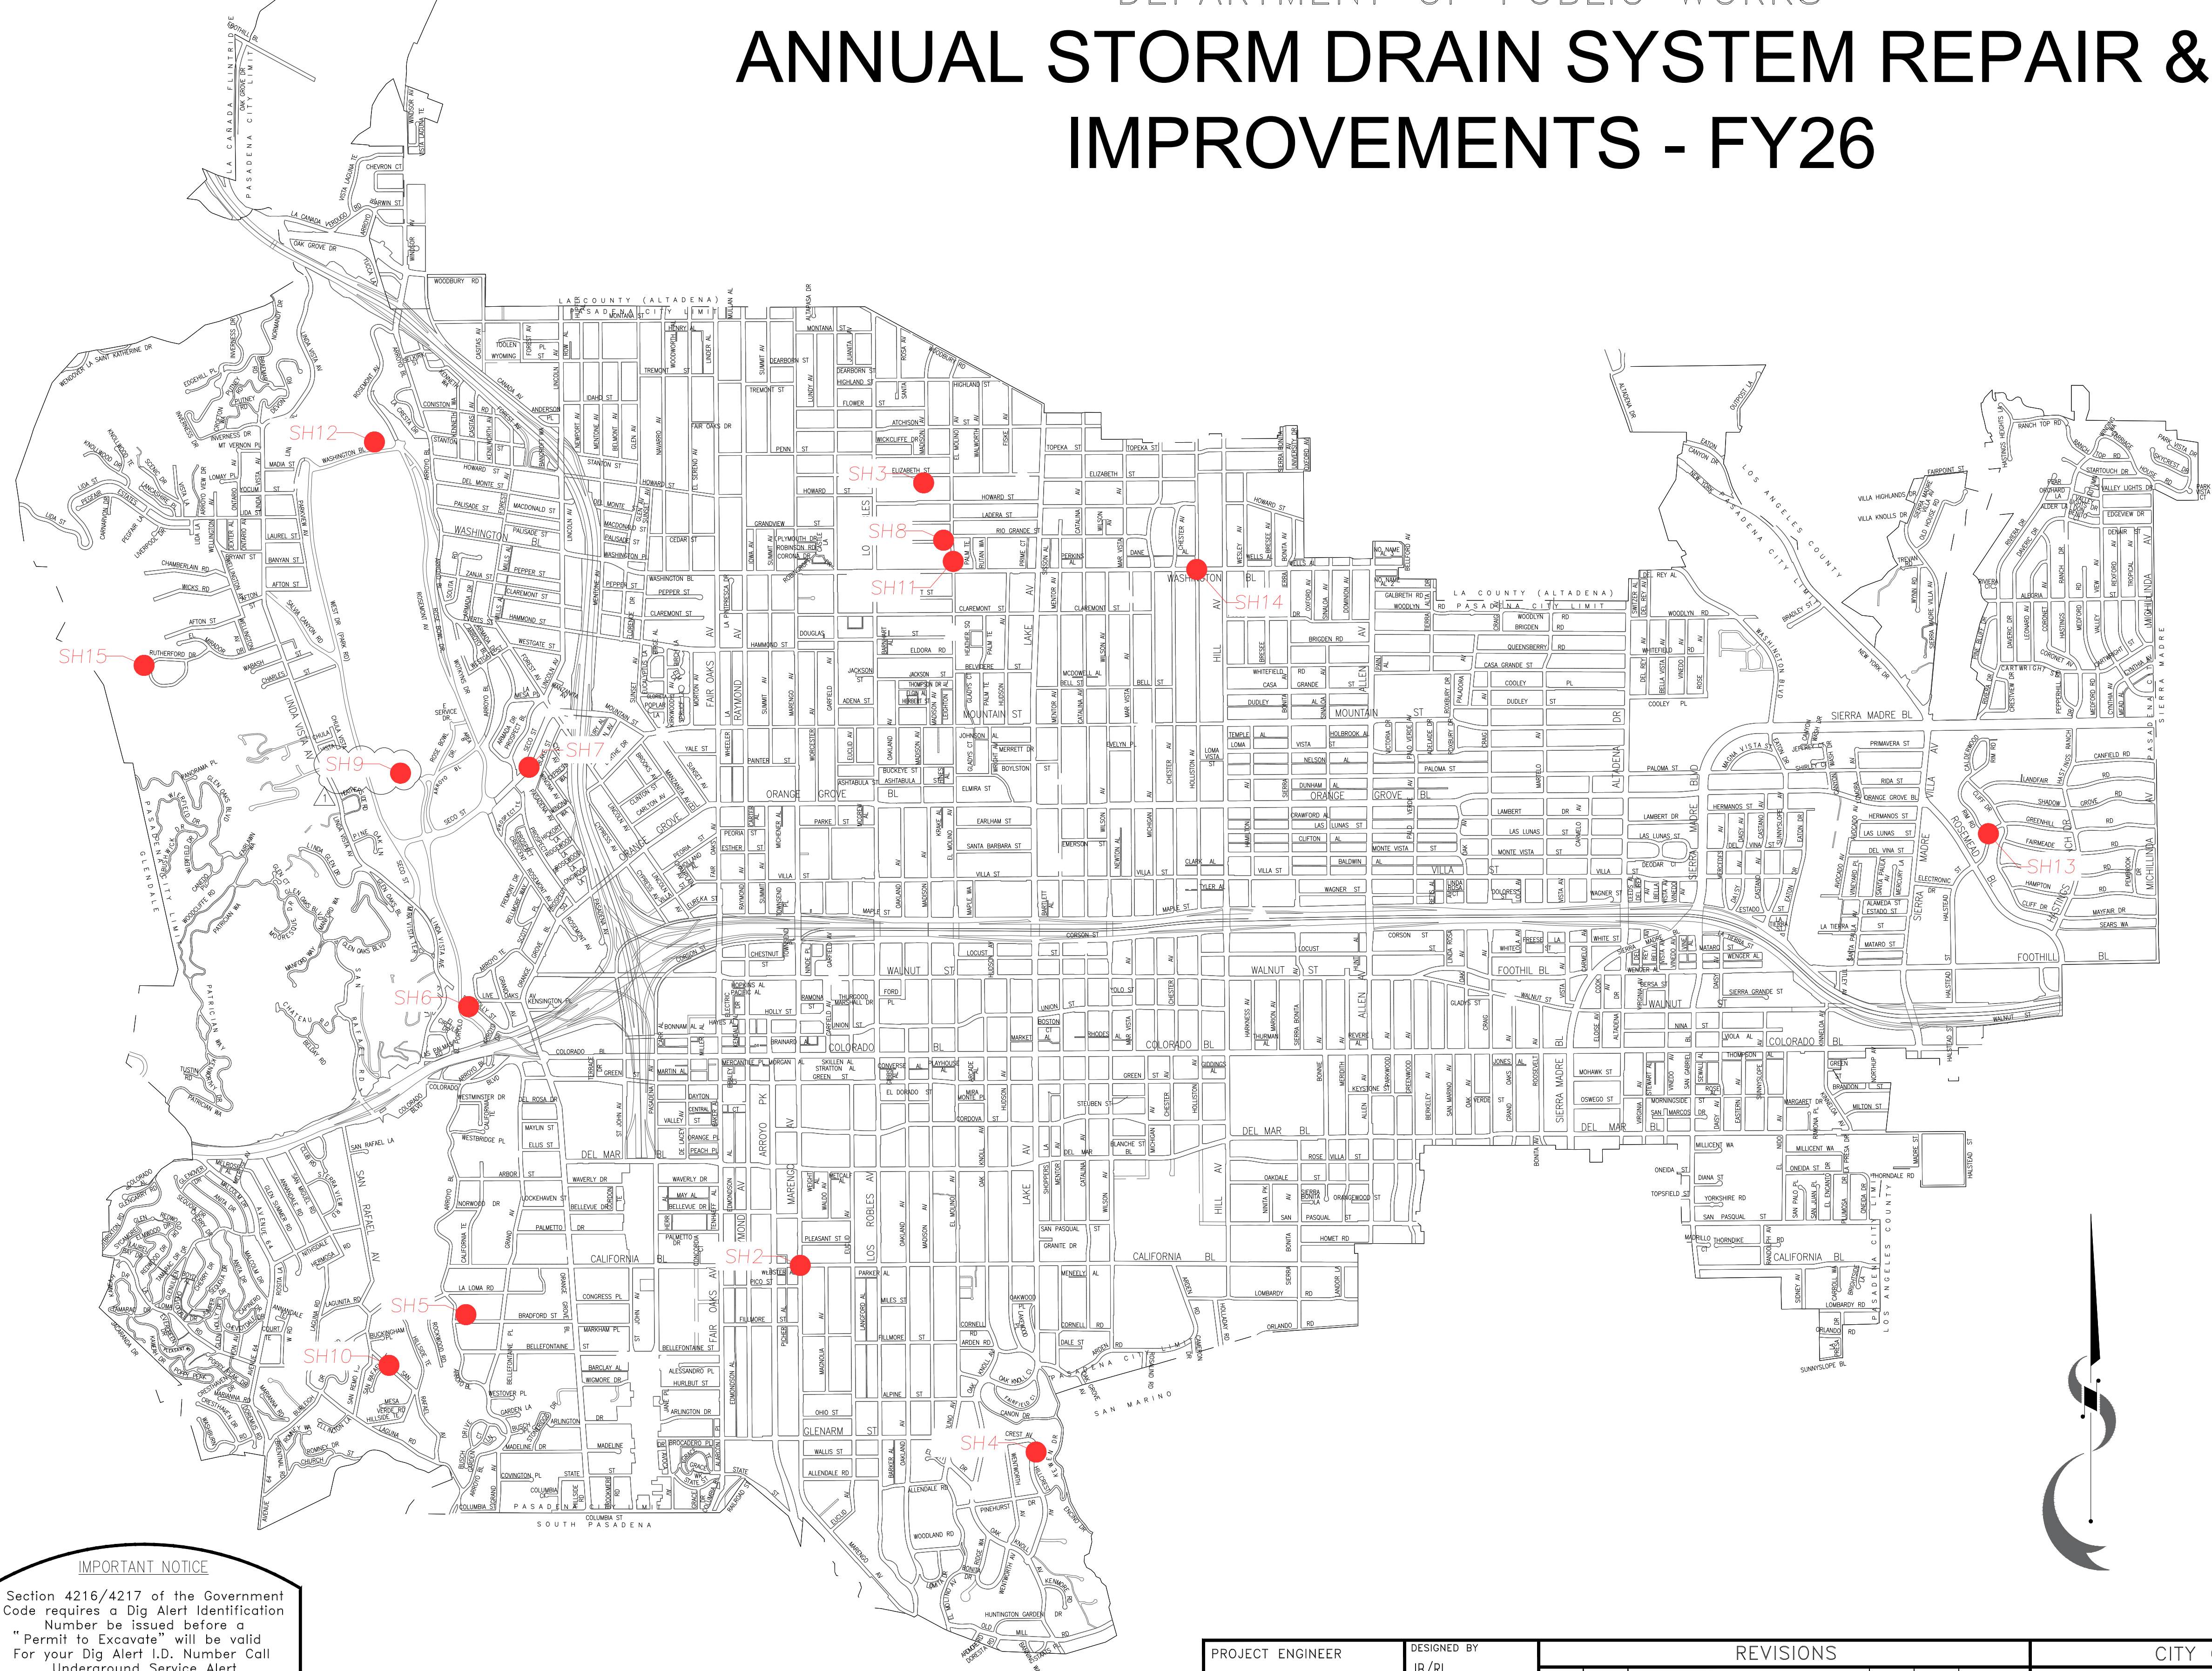

IMPORTANT NOTICE

Section 4216/4217 of the Government Code requires a Dig Alert Identification Number be issued before a "Permit to Excavate" will be valid For your Dig Alert I.D. Number Call Underground Service Alert TOLL FREE-1-800-422-4133 Two working days before you dig.

PROJECT ENGINEER		DESIGNED BY	REVISIONS						CITY OF PASADENA – DEPARTMENT OF PUBLIC WORKS		
		JB/RL	MARK	DATE	DESCRIPTION	BY	CHKD.	APPROVED	PROJECT ANNUAL STORM DRAIN SYSTEM REPAIR & IMPROVEMENTS – FY26		
DATE		DRAWN BY	JB/RL	03/04/26	ADDENDUM 1	JB	TC		LIMITS AS SHOWN		
FIELD BOOK NO. NONE		CHECKED BY	TC						SCALE AS SHOWN		
									ACCOUNT NUMBER 79620		
									SHEET 1 OF 17		
									DWG. NO. 6905		