


SPECIFIED PLANT MATERIAL:
SPECIMEN TO BE APPROVED
BEFORE PLANTING AND ALSO IN
PLACE BY THE CITY ARBORIST

CASE A:
#4 GRAVEL MULCH AS SPECIFIED
OR APPROVED BY THE ENGINEER

CASE B:
POROUS CONCRETE TREE
WELL COVER WITH 457 mm
OPENING AS SPECIFIED OR
APPROVED BY THE ENGINEER

FERTILIZER TABLETS (20-10-5)
21 GRAMS EACH (2 MINIMUM)

2-BUBBLER HEADS IN
DIAGONAL CORNERS (WATERING
COMPONENTS OPTIONAL)

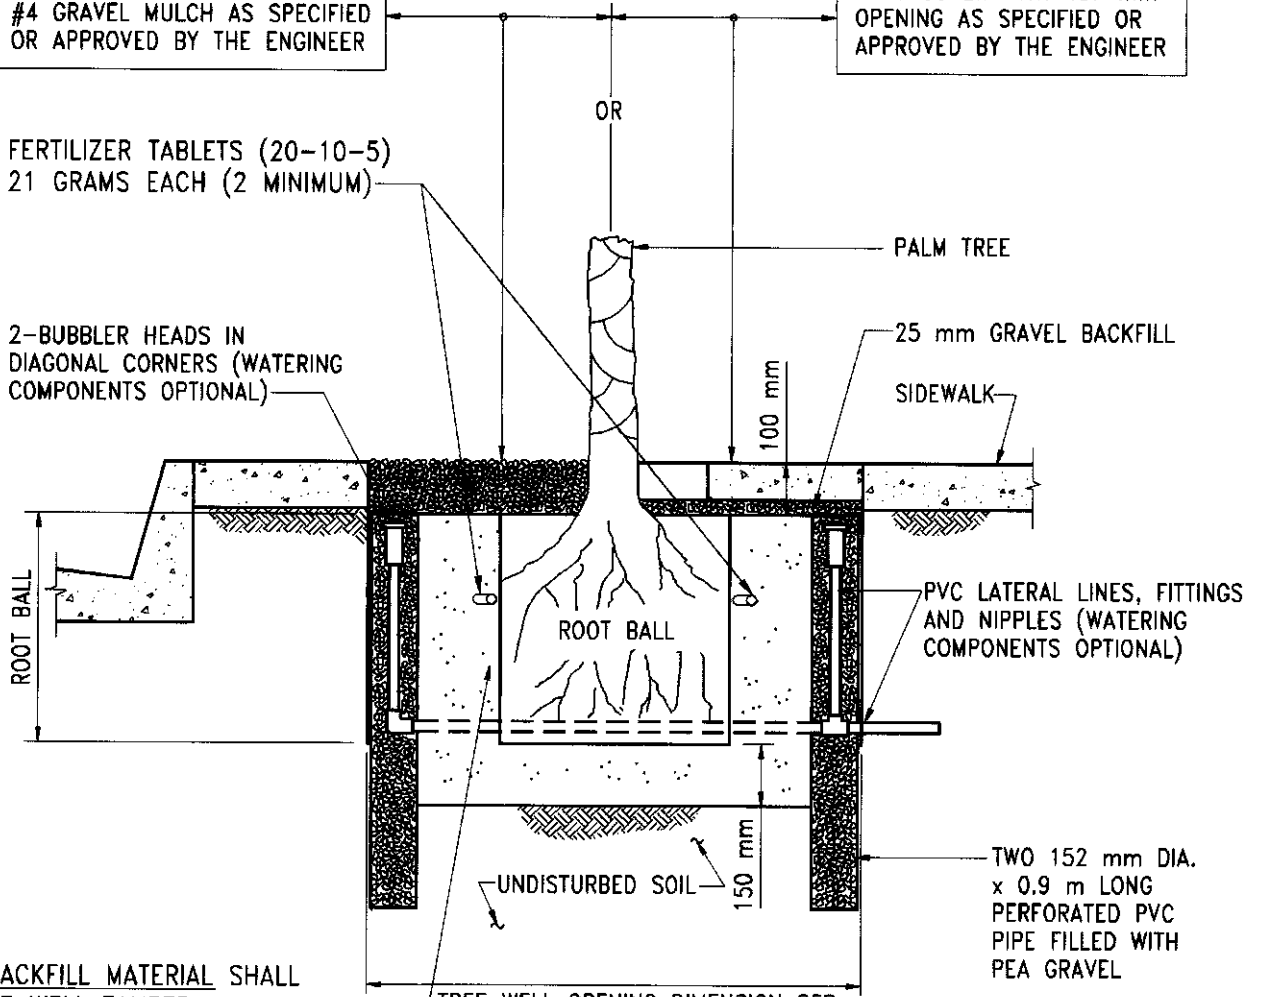

BACKFILL MATERIAL SHALL
BE WELL TAMPED:

WASHINGTONIA PALMS:

100% WASHED PLASTER SAND

ALL OTHER PALMS:

70% NATIVE SOIL

25% WASHED PLASTER SAND

5% TYPE 2 ORGANIC SOIL

AMENDMENT

225 g SUPERPHOSPHATE

PER CUBIC YARD

TREE WELL OPENING DIMENSION PER
STANDARD DRAWING S-625. PLANTING
HOLE SHALL BE EXCAVATED SQUARE
AND ALL SIDES LEFT ROUGH TO
PERMIT ROOT PENETRATION.

CITY OF PASADENA - PUBLIC WORKS & TRANSPORTATION DEPARTMENT

DRAWN BY:
YANNIE WU

DESIGNED BY:
RAY MONTGOMERY

CHECKED BY:
ROBERT GARDNER

SUBMITTED BY:
RAY MONTGOMERY

APPROVED BY:
Daniel A. R.
CITY ENGINEER RCE NO. 38689 EXPIRES MARCH 31, 2001

**TREE PLANTING
- PALM -**

REVISION: 1 UNITS: METRIC

STANDARD PLAN:

S-634

SHEET 1 OF 1

S634-1-LDWG 03/19/99

3/23/99
DATE