


SECTION "A"-"A"

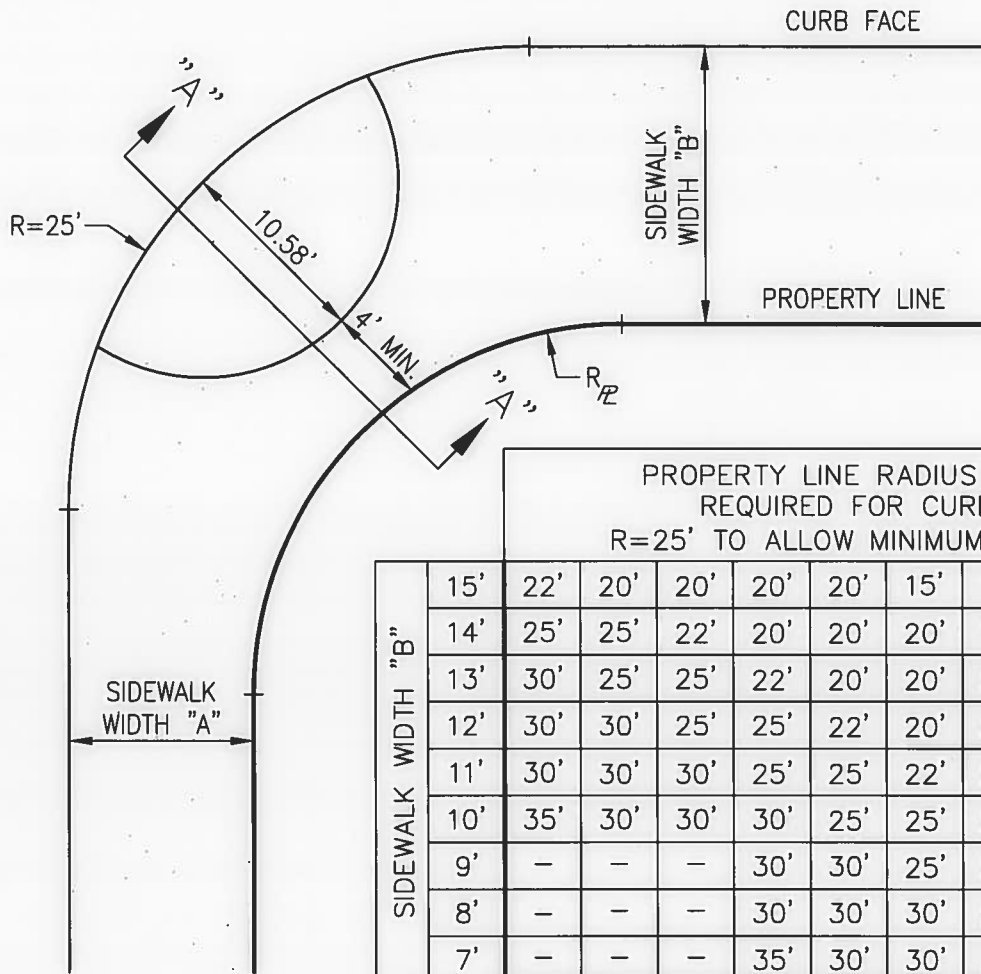

PROPERTY LINE RADIUS (R_P)
REQUIRED FOR CURB
 $R=25'$ TO ALLOW MINIMUM 14.58'

	15'	22'	20'	20'	20'	20'	15'	15'	15'	15'
	14'	25'	25'	22'	20'	20'	20'	15'	15'	15'
	13'	30'	25'	25'	22'	20'	20'	20'	15'	15'
	12'	30'	30'	25'	25'	22'	20'	20'	20'	15'
	11'	30'	30'	30'	25'	25'	22'	20'	20'	20'
	10'	35'	30'	30'	30'	25'	25'	22'	20'	20'
	9'	-	-	-	30'	30'	25'	25'	22'	20'
	8'	-	-	-	30'	30'	30'	25'	25'	20'
	7'	-	-	-	35'	30'	30'	30'	25'	25'
	7'	8'	9'	10'	11'	12'	13'	14'	15'	
	SIDEWALK WIDTH "A"									

CITY OF PASADENA - DEPARTMENT OF PUBLIC WORKS

DRAWN BY:
MARCOS TIEMANN

CHECKED BY:
SEAN SINGLETARY

SUBMITTED BY:
SEAN SINGLETARY

PROPERTY LINE RADIUS REQUIREMENTS
AT INTERSECTIONS


APPROVED BY:
Stu J. Wright
CITY ENGINEER RCE NO. 48650

8/27/14
DATE


REVISION: 2 UNITS: ENGLISH

STANDARD PLAN:
S-423

SHEET 1 OF 6
S-423 DWG 5/06/2014

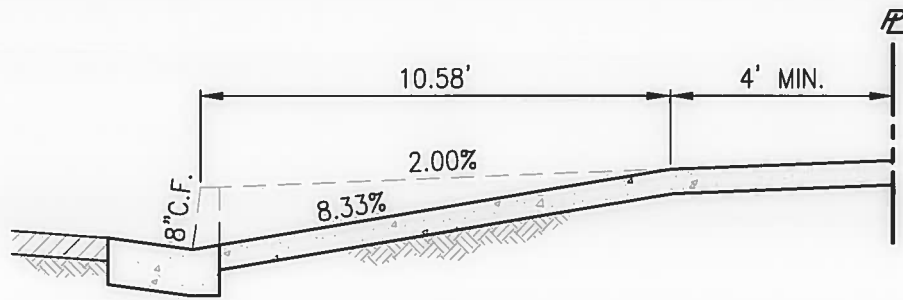

SECTION "A" - "A"

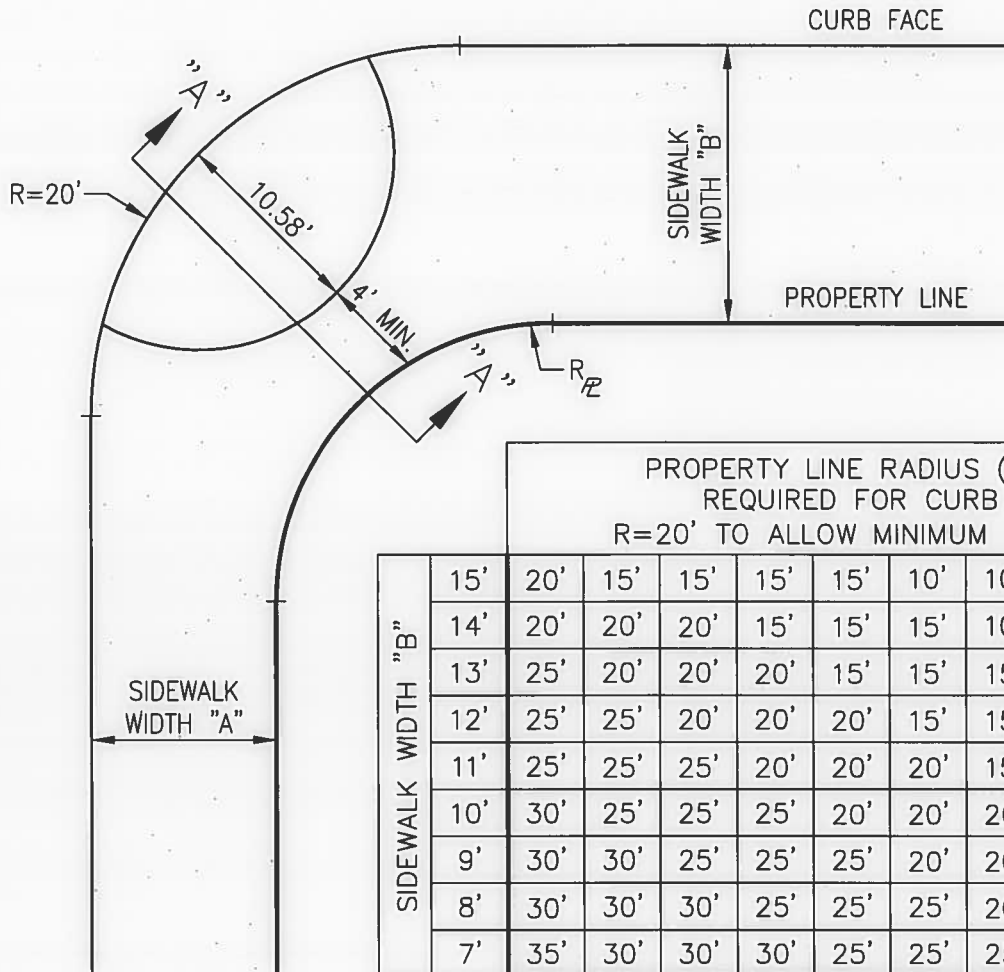

PROPERTY LINE RADIUS (R_P)
REQUIRED FOR CURB
 $R=20'$ TO ALLOW MINIMUM 14.58'

SIDEWALK WIDTH "B"	15'	20'	15'	15'	15'	15'	10'	10'	10'	5'
	14'	20'	20'	20'	15'	15'	15'	10'	10'	10'
	13'	25'	20'	20'	20'	15'	15'	15'	10'	10'
	12'	25'	25'	20'	20'	20'	15'	15'	15'	10'
	11'	25'	25'	25'	20'	20'	20'	15'	15'	15'
	10'	30'	25'	25'	25'	20'	20'	20'	15'	15'
	9'	30'	30'	25'	25'	25'	20'	20'	20'	15'
	8'	30'	30'	30'	25'	25'	25'	20'	20'	15'
	7'	35'	30'	30'	30'	25'	25'	25'	20'	20'
	7'	8'	9'	10'	11'	12'	13'	14'	15'	
SIDEWALK WIDTH "A"										

CITY OF PASADENA - DEPARTMENT OF PUBLIC WORKS

DRAWN BY:
MARCOS TIEMANN

CHECKED BY:
SEAN SINGLETARY

SUBMITTED BY:
SEAN SINGLETARY

**PROPERTY LINE RADIUS REQUIREMENTS
AT INTERSECTIONS**


APPROVED BY:
Steve D. Wright
CITY ENGINEER RCE NO. 48650

8/27/14
DATE


REVISION: 2 UNITS: ENGLISH

STANDARD PLAN:
S-423

SHEET 2 OF 6
S-423.DWG 5/06/2014

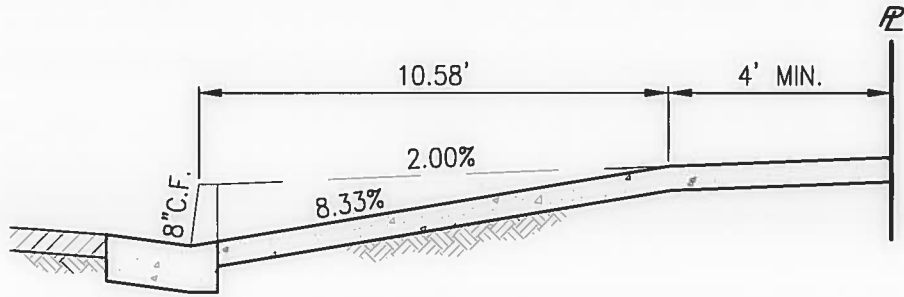

SECTION "A"-"A"

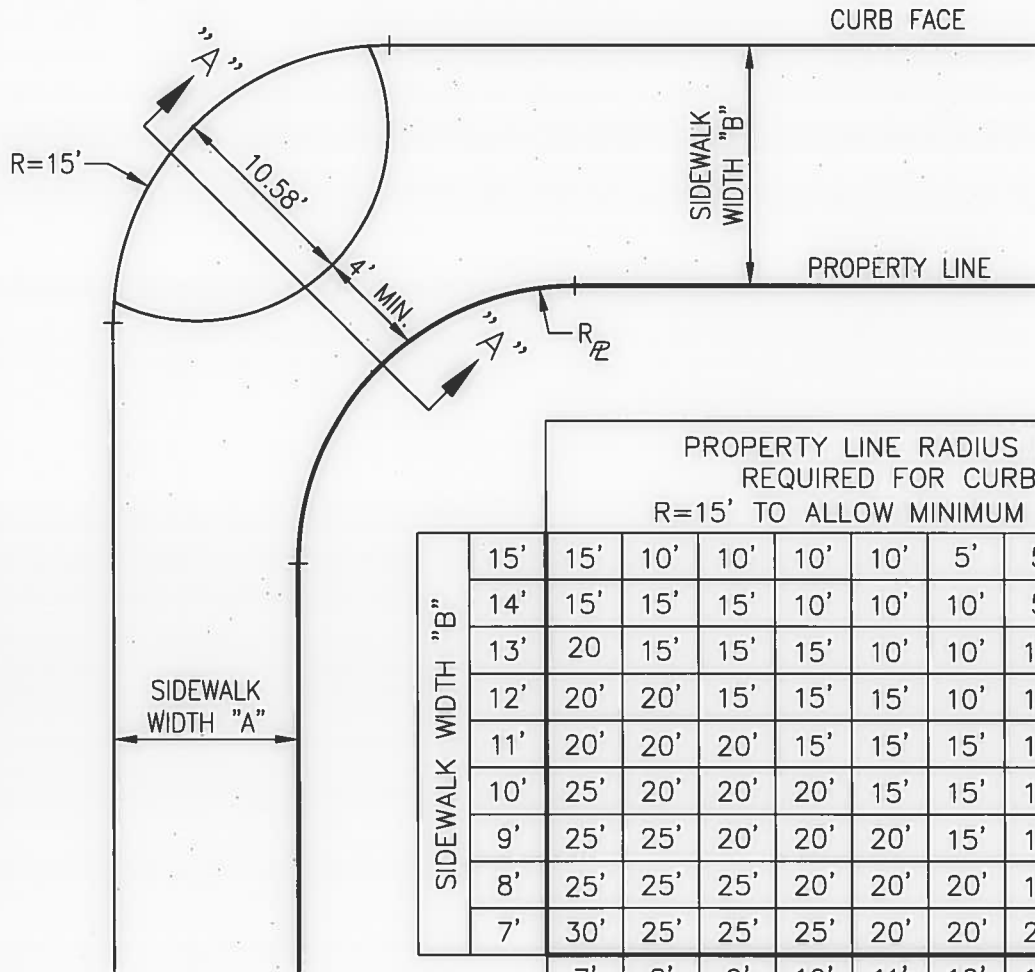

PROPERTY LINE RADIUS (R_P)
REQUIRED FOR CURB
R=15' TO ALLOW MINIMUM 14.58'

	15'	15'	10'	10'	10'	10'	5'	5'	5'	-
	14'	15'	15'	15'	10'	10'	10'	5'	5'	5'
	13'	20'	15'	15'	15'	10'	10'	10'	5'	5'
	12'	20'	20'	15'	15'	15'	10'	10'	10'	5'
	11'	20'	20'	20'	15'	15'	15'	10'	10'	10'
	10'	25'	20'	20'	20'	15'	15'	15'	10'	10'
	9'	25'	25'	20'	20'	20'	15'	15'	15'	10'
	8'	25'	25'	25'	20'	20'	20'	15'	15'	10'
	7'	30'	25'	25'	25'	20'	20'	20'	15'	15'
	7'	8'	9'	10'	11'	12'	13'	14'	15'	

SIDEWALK WIDTH "A"

CITY OF PASADENA - DEPARTMENT OF PUBLIC WORKS

DRAWN BY:
MARCOS TIEMANN

CHECKED BY:
SEAN SINGLETARY

SUBMITTED BY:
SEAN SINGLETARY


**PROPERTY LINE RADIUS REQUIREMENTS
AT INTERSECTIONS**

APPROVED BY:
Stan D. Wight
CITY ENGINEER RCE NO. 48650


01/27/14
DATE

REVISION: 2 UNITS: ENGLISH

STANDARD PLAN:
S-423
SHEET 3 OF 6
S-423 DWG 5/06/2014

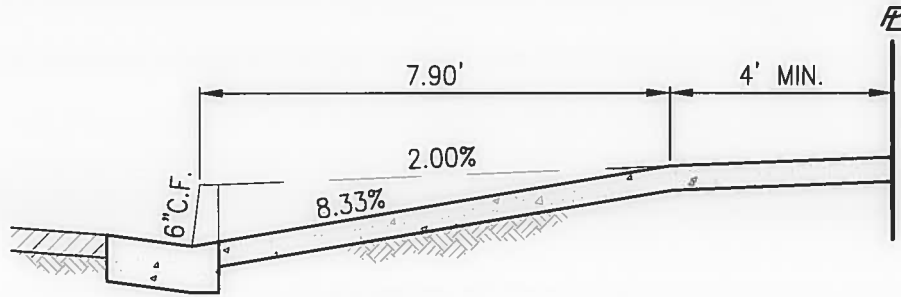

SECTION "A" - "A"

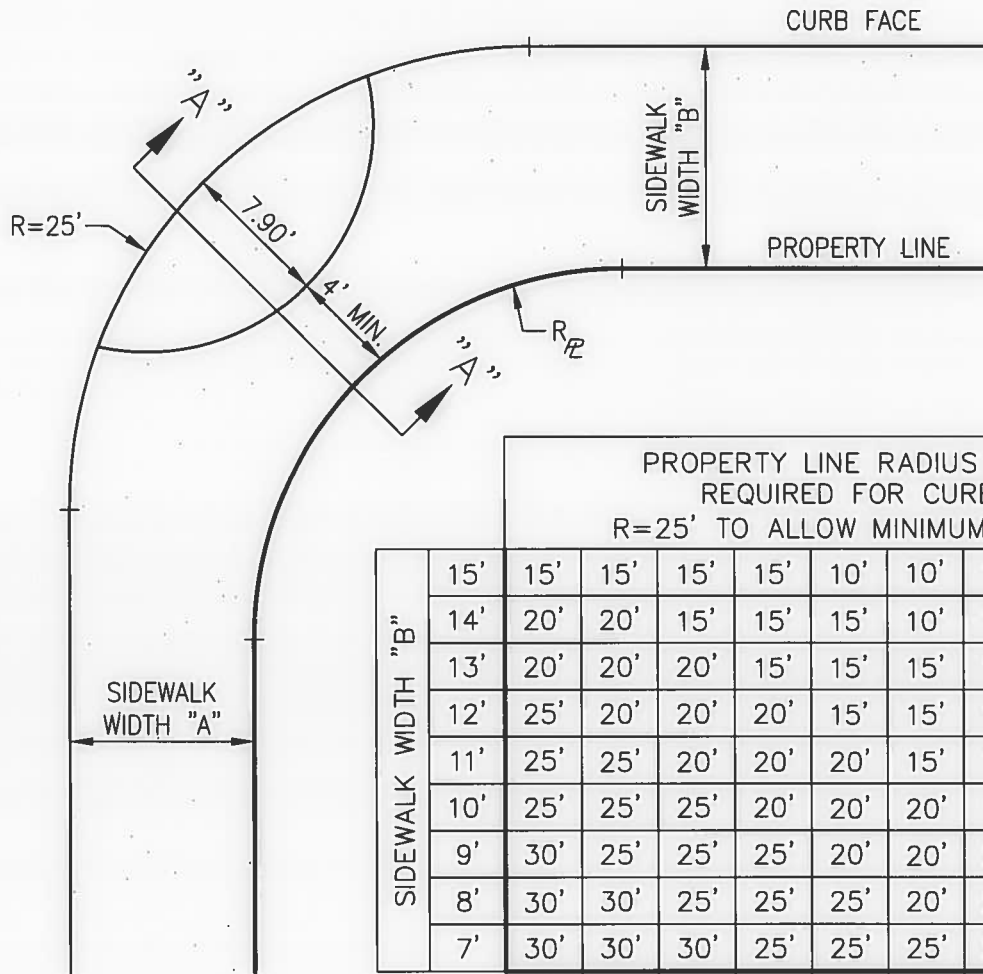

PROPERTY LINE RADIUS (R_P)
REQUIRED FOR CURB
R=25' TO ALLOW MINIMUM 11.90'

SIDEWALK WIDTH "B"	15'	15'	15'	15'	15'	10'	10'	10'	5'	5'
	14'	20'	20'	15'	15'	15'	10'	10'	10'	5'
	13'	20'	20'	20'	15'	15'	15'	10'	10'	10'
	12'	25'	20'	20'	20'	15'	15'	15'	10'	10'
	11'	25'	25'	20'	20'	20'	15'	15'	15'	10'
	10'	25'	25'	25'	20'	20'	20'	15'	15'	15'
	9'	30'	25'	25'	25'	20'	20'	20'	15'	15'
	8'	30'	30'	25'	25'	25'	20'	20'	20'	15'
	7'	30'	30'	30'	25'	25'	25'	20'	20'	15'
	7'	8'	9'	10'	11'	12'	13'	14'	15'	
SIDEWALK WIDTH "A"										

CITY OF PASADENA - DEPARTMENT OF PUBLIC WORKS

DRAWN BY:
MARCOS TIEMANN

CHECKED BY:
SEAN SINGLETARY

SUBMITTED BY:
SEAN SINGLETARY

**PROPERTY LINE RADIUS REQUIREMENTS
AT INTERSECTIONS**


APPROVED BY:
Steve D. Wright
CITY ENGINEER RCE NO. 48650

8/27/14
DATE


REVISION: 2 UNITS: ENGLISH

STANDARD PLAN:
S-423

SHEET 4 OF 6
S-423 DWG 5/06/2014

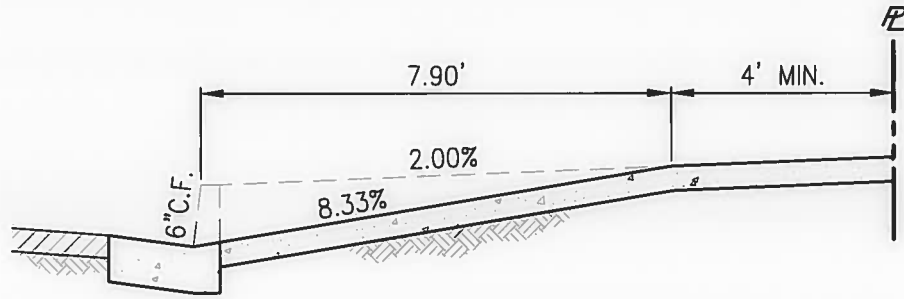

SECTION "A" - "A"

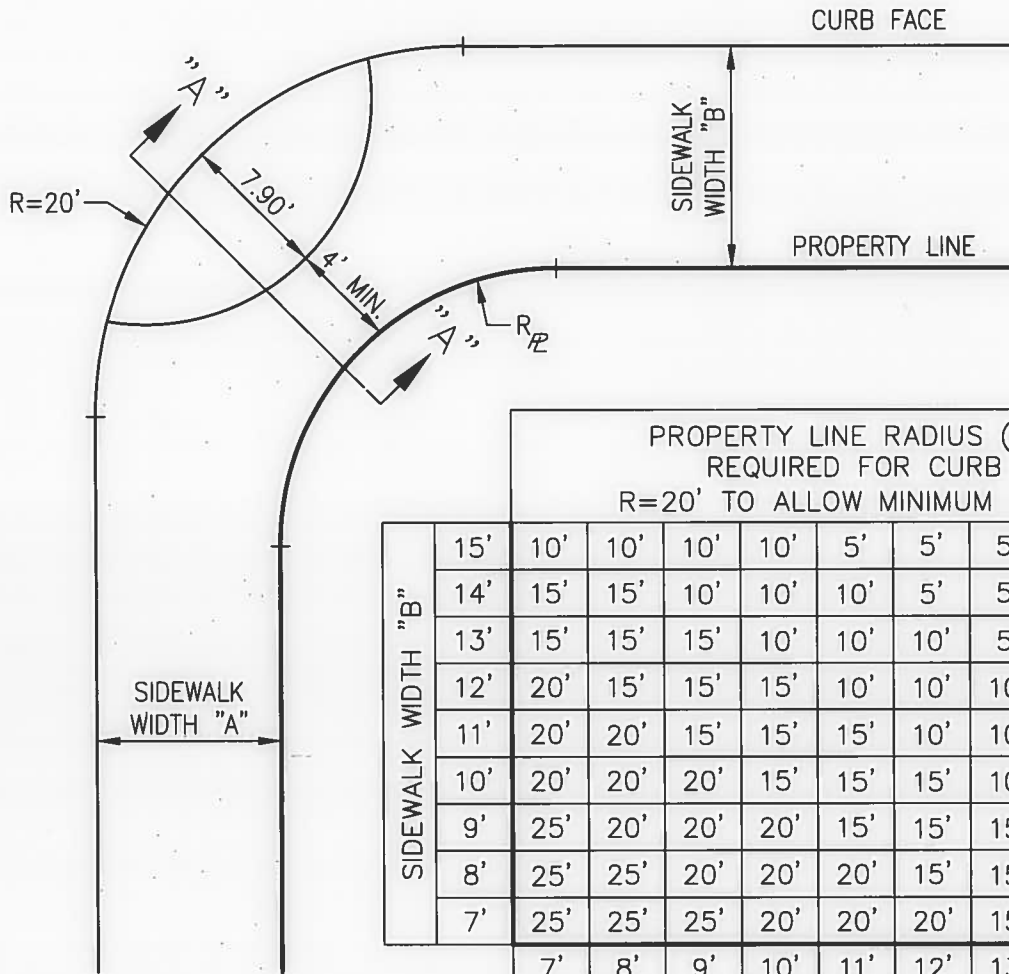

PROPERTY LINE RADIUS (R_P)
REQUIRED FOR CURB
 $R=20'$ TO ALLOW MINIMUM 11.90'

SIDEWALK WIDTH "B"	15'	10'	10'	10'	10'	5'	5'	5'	-	-
	14'	15'	15'	10'	10'	10'	5'	5'	5'	-
	13'	15'	15'	15'	10'	10'	10'	5'	5'	5'
	12'	20'	15'	15'	15'	10'	10'	10'	5'	5'
	11'	20'	20'	15'	15'	15'	10'	10'	10'	5'
	10'	20'	20'	20'	15'	15'	15'	10'	10'	10'
	9'	25'	20'	20'	20'	15'	15'	15'	10'	10'
	8'	25'	25'	20'	20'	20'	15'	15'	15'	10'
	7'	25'	25'	25'	20'	20'	20'	15'	15'	10'
	7'	8'	9'	10'	11'	12'	13'	14'	15'	
SIDEWALK WIDTH "A"										

CITY OF PASADENA - DEPARTMENT OF PUBLIC WORKS

DRAWN BY:
MARCOS TIEMANN

CHECKED BY:
SEAN SINGLETARY

SUBMITTED BY:
SEAN SINGLETARY


PROPERTY LINE RADIUS REQUIREMENTS
AT INTERSECTIONS

APPROVED BY:
Stan A. Wright
CITY ENGINEER RCE NO. 48650


8/27/14
DATE

REVISION: 2 UNITS: ENGLISH

STANDARD PLAN:
S-423
SHEET 5 OF 6
S-423.DWG 5/06/2014

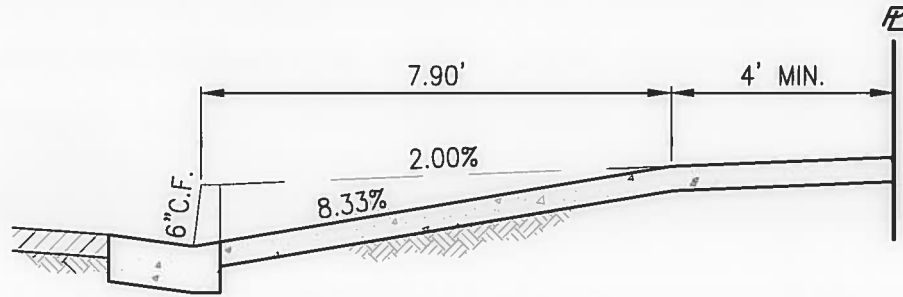

SECTION "A" - "A"

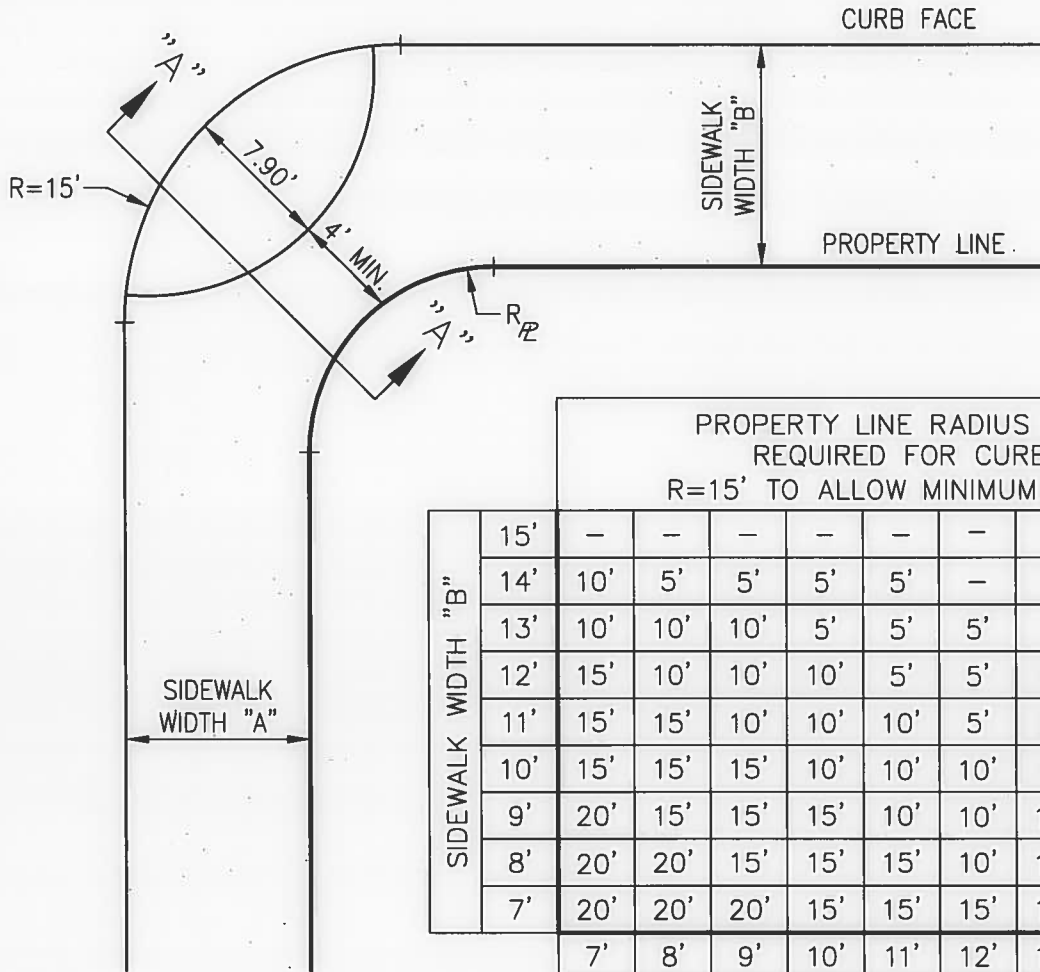

PROPERTY LINE RADIUS (R_P)
REQUIRED FOR CURB
 $R=15'$ TO ALLOW MINIMUM 11.90'

	15'	-	-	-	-	-	-	-	-	-
SIDEWALK WIDTH "B"	14'	10'	5'	5'	5'	5'	-	-	-	-
	13'	10'	10'	10'	5'	5'	5'	-	-	-
	12'	15'	10'	10'	10'	5'	5'	5'	-	-
	11'	15'	15'	10'	10'	10'	5'	5'	5'	-
	10'	15'	15'	15'	10'	10'	10'	5'	5'	-
	9'	20'	15'	15'	15'	10'	10'	10'	5'	-
	8'	20'	20'	15'	15'	15'	10'	10'	5'	-
	7'	20'	20'	20'	15'	15'	15'	10'	10'	-
		7'	8'	9'	10'	11'	12'	13'	14'	15'
	SIDEWALK WIDTH "A"									

CITY OF PASADENA - DEPARTMENT OF PUBLIC WORKS

DRAWN BY:
MARCOS TIEMANN

CHECKED BY:
SEAN SINGLETARY

SUBMITTED BY:
SEAN SINGLETARY

PROPERTY LINE RADIUS REQUIREMENTS
AT INTERSECTIONS

APPROVED BY:
Steve A. Wright
CITY ENGINEER RCE NO. 48650

8/27/14
DATE

REVISION: 2 UNITS: ENGLISH

STANDARD PLAN:
S-423

SHEET 6 OF 6
S-423 DWG 5/06/2014